



## NIGHT SAFE GRADE IV-2

With receipt function and bar code reader.



### Application

Night Safe Grade IV-2 has been developed to meet the market demands for fast and safe deposits with automatic receipt function

### Burglary protection

The Night Safe is tested in accordance with the European standard EN 1143-2 and certified in Grade IV by SBSC and ECBS.

### Description

The complete safe including the chute is constructed in a new barrier material.

The Night Safe can be delivered in different sizes and deposit heights based on capacity need and pavement heights.

### Deposit opening

Height: 100 mm

Width: 160 mm

Depth: 270 mm

### Weight and measurement

See overleaf

### Installation

The Night Safe SA4/Grade Iv is delivered as one unit and is easy to install through up to 250mm wall thickness without any concrete work. The safe is prepared for anchoring

### Locking

As standard the safe is provided with 2 changeable key locks type FAS/S&G 6890.

Available as option:

Combination lock type S&G 8550MP,

Electronic combination lock Wittkopp, Mas Hamilton, ComboGard alt. Comptronic.

### Grill gate

As standard the Night Safe is provided with a grill gate as an extra protection against internal explosion

### Receipt function

Bar code reader in the front to open for deposit.

Photocell to recognise that an item is deposited into the safe.

Bar code reader inside the safe to identify the bar code of the bag deposited.

Receipt printer: Immediately after a deposit is made a receipt is printed with the bar code number. The number of bags deposited and time information and which Night Safe that has been used.

Large logging capacity.

Options:

Hand scanner for identification of deposits.


GSM-modem to enable distance administration and wireless connection to the software.

### Finish

Off white RAL 9010 with a matching control panel.

# Measurements, weight and capacity

Model	500	900	1200	1500
<b>External measurements mm</b>				
Height	975	1375	1675	1975
Width	690	690	690	690
Depth incl. chute (+ 85 mm for handle)	1055	1055	1055	1055
<b>Internal measurements mm</b>				
Height	430	830	1130	1430
Width	400	500	500	500
Depth	400	400	400	400
Deposit volume litre	69	166	226	286
<b>Weight kilo – Grade IV</b>	1080	1430	1690	1940
Standard hanging of the door	Right	Right	Right	Right
Must be anchored to the floor	Yes	Yes	Yes	Yes

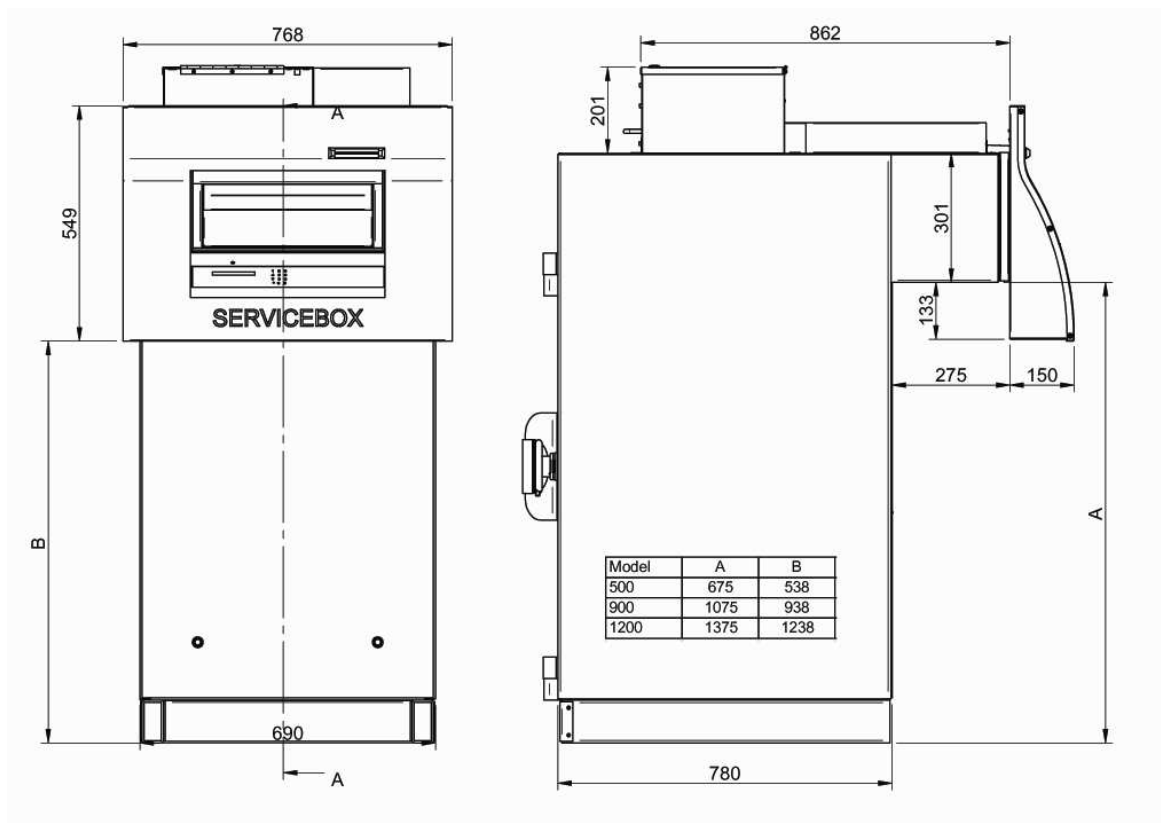

We reserve the right to alter the specification without prior notice.



**Head office**

**Robur Safe AB**

Lundbyvägen 8  
SE-310 50 SLÖINGE  
Phone: +46 346 260 260  
Fax: +46 346 260 222

info@robursafe.com

www.robursafe.com